

Product specification sheet

SP12 | SP13 | SP14


Product specification sheet

Warm edge spacer SP12 | SP13 | SP14

Material: Polypropylene (0.22 W/mK), stainless steel (15 W/mK), steel wire at SP14 (optional)

Colors: Similar to RAL 7035, similar to RAL 7040, similar to RAL 8003, similar to RAL 8016, similar to RAL 9005, similar to RAL 9016

Certifications: EN 1279 2, 3 & 6 appendix B, EN 1279-4:2018, appendix C, H + ift-guideline VE-07/3 2018-01, EN ISO 4892-2, DTA and ASTM (Currently only valid for the SP14). It is a certified Passive House Component Class pHB for Cold Climate.

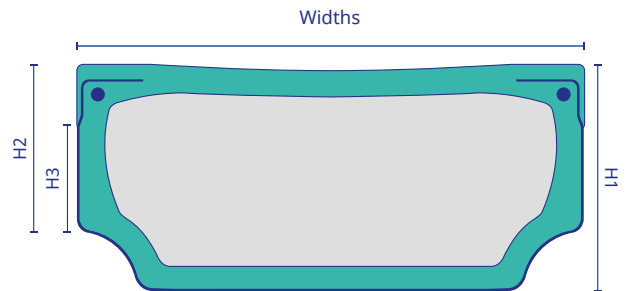

Spacer bar	Widths ± 0.15 [mm]	H1 ± 0.15 [mm]	H2 ≈ 0.15 [mm]	H3 Butyl area [mm]	Theoretical desiccant quantity [g/m] ²
8 mm ¹	7.45		–	5.20	21
10 mm	9.45				26
12 mm	11.45				34
13 mm	12.45				38
14 mm	13.45				42
15 mm	14.45				46
16 mm	15.45	6.85	≈ 5.10	3.64	50
18 mm	17.45				56
20 mm	19.45				62
22 mm	21.45				70
24 mm	23.45				78
26 mm	25.45				85
30 mm	29.45				101

¹ Different to drawing, without wire ² Grace 551

	Specification	Test method
	6000 mm +10/-0 mm	Measuring tape
	0.20 mm +0.3/-0.1 mm	Caliper
	≤ 13 kg	Dynamometer
	$\lambda_{eq} 2B =$ 0.31 W/(m · K)	Test at ift Rosenheim according to EN 12664:2001-01

	Specification	Test method
	Inlet pressure 5 bar ≥ 2 bar - ≤ 4 bar	Manometer
	< 0.02 %	Test at ift Rosen- heim according to EN 1279-4:2018 Annex H
	No significant color change after 4000 h	EN ISO 4892-2
	Rp0.2 ≥ 40 N/mm ² reference SP14 width 16 mm	3 point bend- ing test

In case of specific questions we gladly offer you our individual support.

Thermal edge bond solutions
for insulating glass