

Product specification sheet

MU10| Warm edge muntin bar system


Material: Core consisting of polypropylene and glass fibers, Cover consisting of pure polypropylene

Colors: similar RAL 7035, RAL 7040, RAL 9005, RAL 9016, RAL 8003, RAL 8016

Certificates: EN 1279-6, EN ISO 4892-2

Profile length: 6,000 +10/-0 mm, 3,000 +10/-0 mm

Width ± 0.02 [mm]	Height ± 0.02 [mm]	Recommended air gap [mm]
21.5	9.5	12
25.5	9.5	12
31.5	9.5	12
21.5	11.5	14
25.5	11.5	14
31.5	11.5	14
21.5	13.5	16
31.5	13.5	16

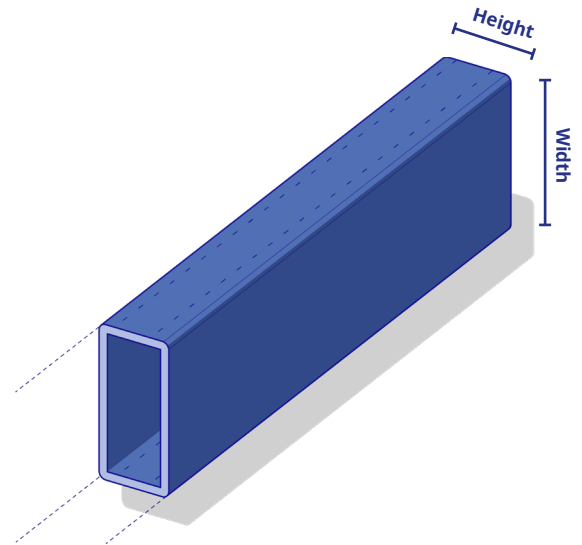

Version_02 | 2026

	Specification	Test method
	6,000 mm +10/-0 mm	Measuring tape
	¹ 0.20 mm +0.3/-0.2 mm ² 0.45 mm +/-0.2	Caliper
	80 N +0/-50	Dynamometer

	Specification	Test method
	< 0.02 %	Tested at IFT Rosenheim according to EN 1279- 4:2018, appendix H
	No significant color change after 4,000 h	EN ISO 4892-2
	No visible impairments when viewed behind glass at a distance of 50 cm	Technoform Guideline for the assessment of visual quality