

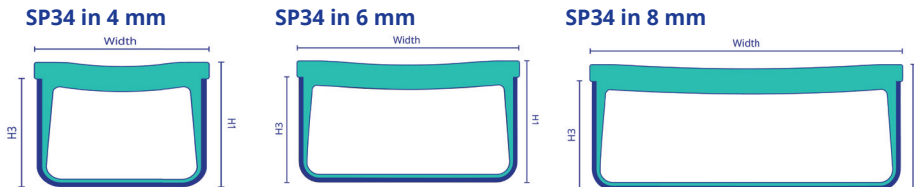
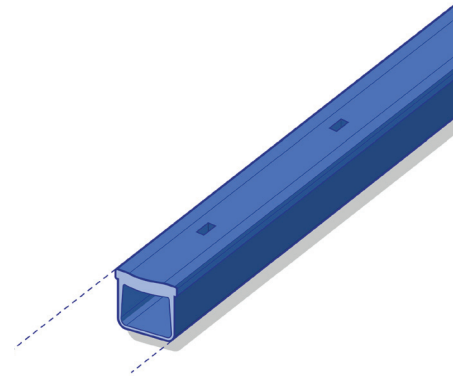
Product specification sheet

SP34 | Warm edge spacer for heritage windows




Material: Polypropylene (0.22 W/mK), stainless steel (25 W/mK)


Colors: Similar to RAL 9005, RAL 9016, RAL 7040

Certificates: EN 1279 parts 2, 3 & 6



Spacer	Widths ± 0.15 [mm]	H1 ± 0.15 [mm]	H3 Butyl area [mm] ± 0,1 mm	Theoretical desiccant quantity [g/m] ²
4 mm	3.5	3.0	2.6	5
6 mm	5.5	3.0	2.6	9
8 mm	7.5	3.0	2.6	13

	Specification	Test method
	2000mm +10/-0 mm	Measuring tape
	0.10 mm +0.15 / -0.05 mm	Caliper
	No visible impairments when viewed behind glass at a distance of 50 cm	Technoform Guideline for the assessment of visual quality

	Specification	Test method
	Perforation in tolerance	Visual control
	No significant color change after 4,000 h	EN ISO 4892-2